






Hotel Doorbell System with Occupancy Indicator

Is a touch panel which is a combination of a doorbell, a 'do not disturb' and 'make up' room signs all in one. If the guest activates one of the buttons on the indoor panel the corresponding indicators on outdoor are lit. When the 'Do not Disturb' indicator is lit, the 'Bell' button cannot be used.

		
Outside Panel with Do Not Disturb Make Up Room Bell	In-Room Panel with Do Not Disturb Make Up Room	Door Bell/Chime

Different types of Outdoor panels are available and can be customized with Hotel with room Number, name, logo etc.....



SMART HOTEL SOLUTIONS

Tel: 1 300 796 471

Fax: 03 8610 0073

Smart Hotel Solutions Pty Ltd
Melbourne Head Office, 3/35
Taunton Drive Cheltenham Vic.
3192, Melbourne, Australia

E-mail: info@smartsol.com.au

www.smartsol.com.au



There are 3 colours of the LED lights: Blue, Red and Green. Red is used for DND, Green for Make Up Room and Blue for the rest. The icons can be change or even removed for hotel preference

Occupancy Indicator

When paired with the Energy Management system, a secret button on outdoor panel (DND Icon) can be pressed and the occupancy controller will advise the hotel staff member if the room is occupied or not by Flashing light indicator on the outdoor panel. This is very helpful for hotel staff knowing if guests are in the room or not without knocking or ringing the doorbell.

Installation

The kit consists of the three components above. The doorbell unit normally sits in the roof space above the door and is connected to 240 Volt power. Two standard Cat5 (Ethernet) cables are then used to connect the doorbell unit to both the indoor and outdoor panel and power is delivered to them over that cable as well.

The unit comes standard with a white plastic face plate as shown above. The following metal face plates are also available as an option.



Bright Chrome



Bright Gold



Pearl Chrome



Satin Chrome



Satin Gold

Specifications

Operating temperature range	-10 degree centigrade to 50 degree centigrade
Operating humidity range	0%-95%
Operating voltage	85-245 V AC
Operating frequency	50HZ / 60 HZ
Dimension of product	86*86*25mm
Certifications	c-tick and CE

SMART HOTEL SOLUTIONS

Tel: 1 300 796 471

Fax: 03 8610 0073


Smart Hotel Solutions Pty Ltd
Melbourne Head Office, 3/35
Taunton Drive Cheltenham Vic.
3192, Melbourne, Australia

E-mail: info@smartsol.com.au

www.smartsol.com.au




Images of the Hotel Door Bell

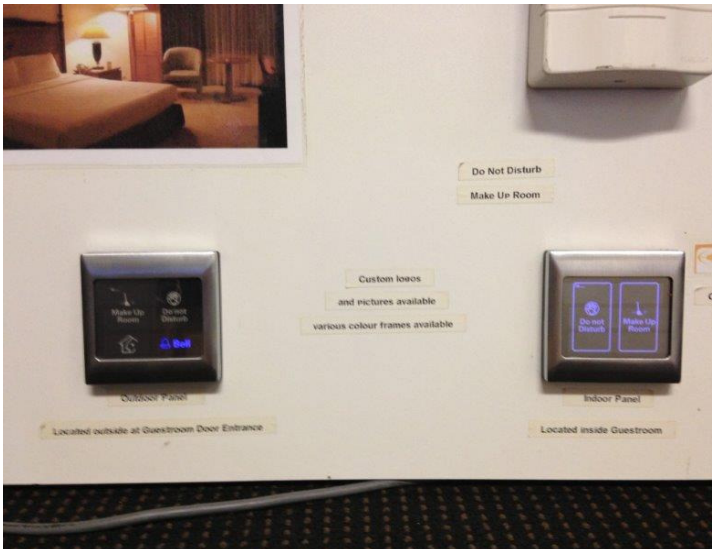

Door Bell Panels in a lit environment



Door Bell Panels with the lights off

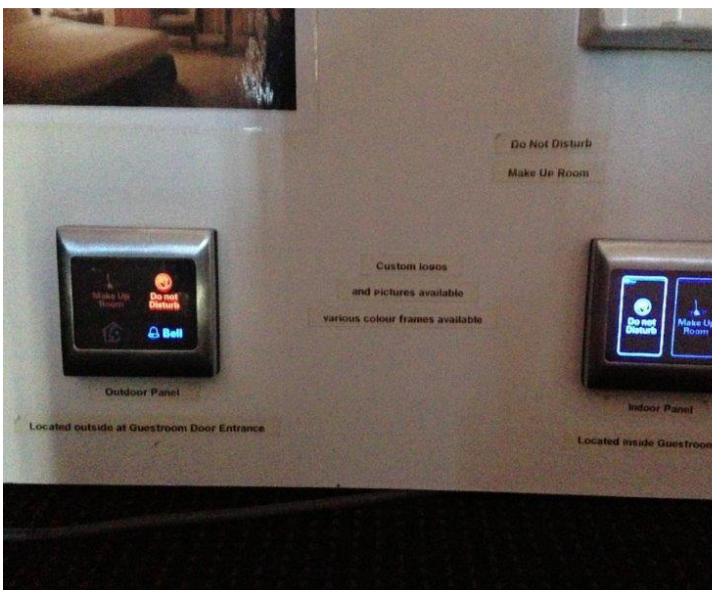

Panel with the DND Turned On



Panel with the Make-Up Room Turned On

SMART HOTEL SOLUTIONS

Tel: 1 300 796 471

Fax: 03 8610 0073

Smart Hotel Solutions Pty Ltd
Melbourne Head Office, 3/35
Taunton Drive Cheltenham Vic.
3192, Melbourne, Australia

E-mail: info@smartsol.com.au

www.smartsol.com.au